

Right Angle Sanders for use with Abrasive Discs

2" (50 mm)
0.4 H.P. - 0.7 H.P. (300 - 525 W)



280RAK/290RAK/330RAK/340RAK

Air Inlet Size: 1/4" NPT
Hose Size Recommendations: 3/8" (10mm)
Extra Charge Accessories

- Safety Lever

Standard Equipment

- Tool • Operating Instructions and Service Manual
- 2 Wrenches (sizes based on options)

Special Features

- Small Right Angle Head for Limited Space Sanding

Quick Order Number


This chart has been provided as a means to quickly identify a particular tool. The ordering numbers listed represent the most common versions of our tools. If more specialized versions are required, please build your model number per the following model number flow chart.

Model Number	Spindle Thread	Rated Speed	Throttle Type	
			Standard Lever	Safety Lever
280RA	1/4-20 External	16000 RPM	280RA6	280RA6K
290RA		26000 RPM	290RA6	290RA6K
330RA		12000 RPM	330RA6	330RA6K
340RA		20000 RPM	340RA6	340RA6K


The tools listed in this chart will be provided with an aluminum housing. Steel housing material is available. See information below for the entire spectrum of options available.



Front view of 280RA/290RA/330RA/340RA Series Tools




Internal Thread Output w/Flanges to Mount 1/4" ID Surface Conditioning Discs




Internal Thread Output w/o Flanges to Mount Cartridge Rolls

Very Small RA Head for Applications where Size is Critical



280RAK/290RAK/330RAK/340RAK

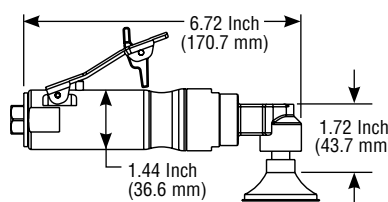

280RA/290RA - 0.4 H.P. (300 W)
330RA/340RA - 0.7 H.P. (525 W)



	<i>Aluminum</i>	<i>Steel</i>
280RA - 1.3 Lbs. (0.6 Kg)	1.8 Lbs. (0.8 Kg)	
290RA - 1.3 Lbs. (0.6 Kg)	1.8 Lbs. (0.8 Kg)	
330RA - 1.4 Lbs. (0.6 Kg)	2.0 Lbs. (0.9 Kg)	
340RA - 1.4 Lbs. (0.6 Kg)	2.0 Lbs. (0.9 Kg)	



280RA/290RA - 18 cfm (8.5 L/s) Max.
330RA/340RA - 25 cfm (11.8 L/s) Max.

Example Model Number: **330RA 6 K S ; 12000**

The blue highlighted entries are shown in the Quick Reference Box above.

Model Number	Spindle Options	Lever Style	Case Material	Operating Speed
280RA				16000 - 16000 R.P.M.
290RA	5 - 1/4-28 Internal	Please choose one of the following options: No Designation - Standard Lever K - Safety Lever	Please choose one of the following options: No Designation - Aluminum Case S - Steel Case	26000 - 26000 R.P.M.
330RA	6 - 1/4-20 External			12000 - 12000 R.P.M.
340RA	7 - 1/2-28 Internal			20000 - 20000 R.P.M.
Geared Tool				



WARNING: Follow all recommendations from component and abrasive manufacturers for speeds and proper usage.