


Grinders for Depressed Center Wheels, Cut Off Wheels & Flap Wheels

3" (75 mm) – 6" (150 mm)
.9 H.P. (675 W)



Air Inlet Size: 1/4" NPT
Hose Size Recommendations: 3/8" (10 mm)

Extra Charge Accessories







- Type 27 Adapters
- Sanding Pads

Standard Equipment

- Tool • Operating Instructions and Service Manual
- 2 Wrenches (sizes based on options)


The depressed center wheel adapters are not supplied as standard equipment with the tools. If you are using a wheel that requires the adapters, they must be purchased separately.

Quick Order Number					
Model Number	Spindle Thread	Guard Size	Rated Speed	Throttle Type	
				Standard Lever	Safety Lever
44RA	3/8-24	4 Inch (100mm)	11000 R.P.M.	44RA4;427	44RA4K;427
	5/8-11	4 1/2 (115mm)		44RA2;4527	44RA2K;4527
44RAE	3/8-24	4 Inch (100mm)	11000 R.P.M.	44RAE4;427	44RAE4K;427
	5/8-11	4 1/2 (115mm)		44RAE2;4527	44RAE2K;4527
	3/8-24	6 Inch (150mm)	10000 R.P.M.	44RAE4;641	44RAE4K;641
	5/8-11			44RAE2;641	44RAE2K;641
46RA	3/8-24	4 Inch (100mm)	15000 R.P.M.	46RA1;427	46RA1K;427
48RA	3/8-24	4 Inch (100mm)	11000 R.P.M.	48RA4;427	48RA4K;427
	5/8-11	4 1/2 (115mm)		48RA2;4527	48RA2K;4527
	3/8-24	6 Inch (150mm)	10000 R.P.M.	48RA4;641	48RA4K;641
	5/8-11			48RA2;641	48RA2K;641

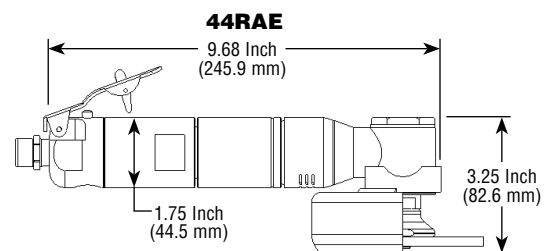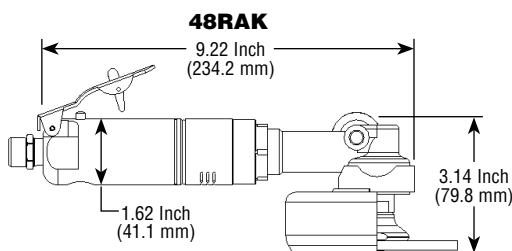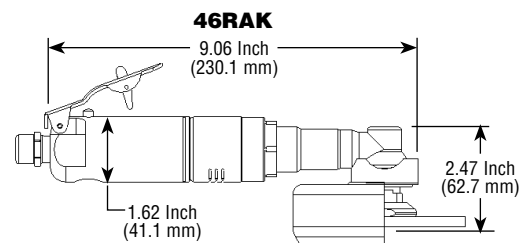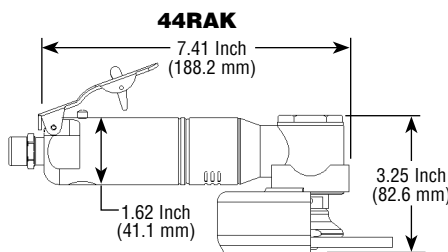

Right Angle Collet Grinders

.9 H.P. (675 W)






Air Inlet Size: 1/4" NPT
Hose Size Recommendations: 3/8" (10 mm)
Extra Charge Accessories

- Safety Lever
- Standard Equipment**
- Tool • Operating Instructions and Service Manual
- 2 Wrenches (sizes based on options)

Quick Order Number

Model Number	Collet Size	Rated Speed	Throttle Type	
			Standard Lever	Safety Lever
44RA	1/4 Inch	11000 R.P.M.	44RAD;1/4	44RADK;1/4
46RA		15000 R.P.M.	46RAD;1/4	46RADK;1/4
48RA		11000 R.P.M.	48RAD;1/4	48RADK;1/4

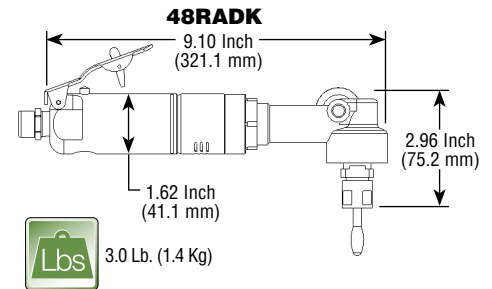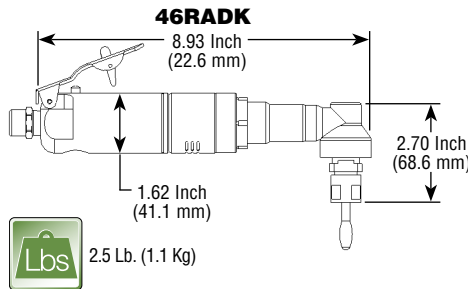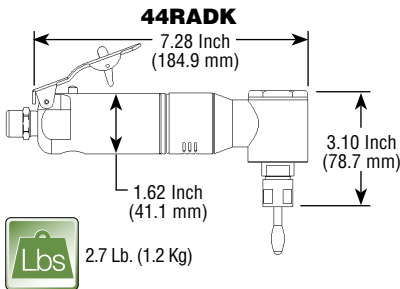


Right Angle Sanders for use with Abrasive Discs

4" (100 mm) - 5" (125 mm)
 0.9 H.P. (675 W)





Air Inlet Size: 1/4" NPT
Hose Size Recommendations: 3/8" (10 mm)
Extra Charge Accessories

- Extended Case
- Safety Lever
- Standard Equipment**
- Tool • Operating Instructions and Service Manual
- 2 Wrenches (sizes based on options)



Quick Order Number

Model Number	Spindle Thread	Sanding Pad Size	Rated Speed	Throttle Type	
				Standard Lever	Safety Lever
44RA	3/8-24	4 Inch (100mm)	11000 R.P.M.	44RA4;4SP	44RA4K;4SP
		5 Inch (125mm)	10000 R.P.M.	44RA4;5SP	44RA4K;5SP
	5/8-11	4 Inch (100mm)	11000 R.P.M.	44RA2;4SP	44RA2K;4SP
		5 Inch (125mm)	10000 R.P.M.	44RA2;5SP	44RA2K;5SP
48RA	3/8-24	4 Inch (100mm)	11000 R.P.M.	48RA4;4SP	48RA4K;4SP
		5 Inch (125mm)	10000 R.P.M.	48RA4;5SP	48RA4K;5SP
	5/8-11	4 Inch (100mm)	11000 R.P.M.	48RA2;4SP	48RA2K;4SP
		5 Inch (125mm)	10000 R.P.M.	48RA2;5SP	48RA2K;5SP

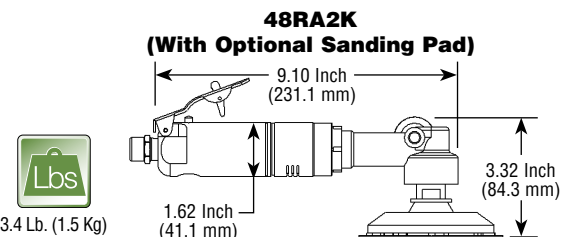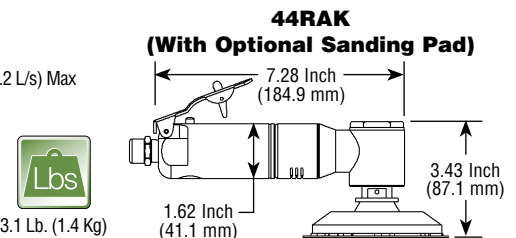


Insert Style Die Grinders For Carbide Burrs & Mounted Stones

Insert Style Collets
0.9 H.P. (675 W)





Air Inlet Size: 1/4" NPT
Hose Size Recommendations: 3/8" (10 mm)
Extra Charge Accessories

- Safety Lever
- Standard Equipment**
- Tool • Operating Instructions and Service Manual
- 2 Wrenches (sizes based on options)




Quick Order Number Die Grinders

Model Number	Collet Size	Rated Speed	Throttle Type	
			Standard Lever	Safety Lever
40G	1/4 Inch	18000 R.P.M.	40G;18	40GK;18
		22000 R.P.M.	40G;22	40GK;22
4121G		18000 R.P.M.	4121G;18	4121GK;18
		22000 R.P.M.	4121G;22	4121GK;22

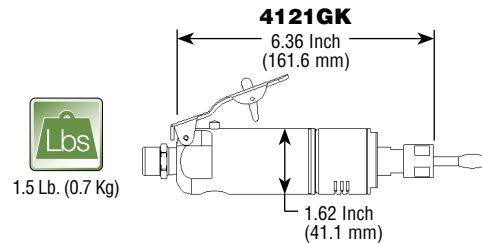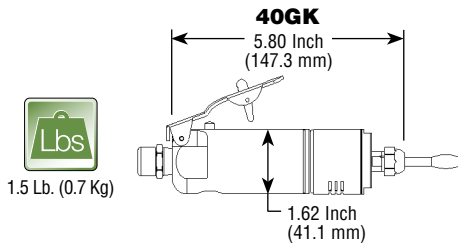

Grinders For Type 1 Wheels, Flap Wheels And Wire Wheels

3" (75 mm) – 4" (100 mm)
0.9 H.P. (675 W)






Air Inlet Size: 1/4" NPT
Hose Size Recommendations: 3/8" (9.5 mm)
Extra Charge Accessories

- Cone Wheel Adapters • Heavy-Duty 2-pc. Collets
- Erickson Style Collets • Safety Lever • Extended Length Spindle
- +2 and +3 spindles for use with buffing wheels (40GH & 47GH only)

- Standard Equipment**
- Tool • Operating Instructions and Service Manual
 - 2 Wrenches (sizes based on options)

Quick Order Number Horizontal T1 Wheel Grinders

Model Number	Guard Size	Rated Speed	Throttle Type	
			Standard Lever	Safety Lever
40GH	3 Inch (75mm)	18000 R.P.M.	40GH;301	40GHK;301
	4 Inch (100mm)	15000 R.P.M.	40GH;401	40GHK;401

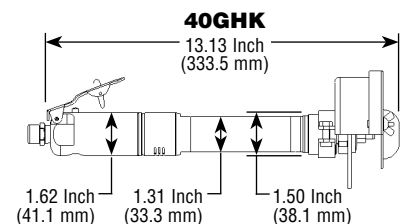

Fixed Size Collet Die Grinders for Carbide Burrs & Mounted Stones

Built In Collets
0.9 H.P. (675 W)



40GHK

Air Inlet Size: 1/4" NPT

Hose Size Recommendations: 3/8" (10 mm)

Extra Charge Accessories


- Safety Lever

Standard Equipment

- Tool • Operating Instructions and Service Manual
- 2 Wrenches (sizes based on options)

Quick Order Number Die Grinders

Model Number	Collet Size	Rated Speed	Throttle Type	
			Standard Lever	Safety Lever
40GH	1/4 Inch	18000 R.P.M.	40GH;18;1/4	40GHK;18;1/4
		22000 R.P.M.	40GH;22;1/4	40GHK;22;1/4

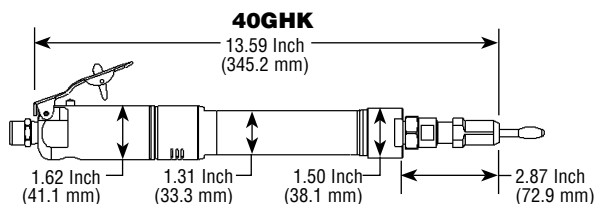

0.9 H.P.
(675 W)



30 cfm (14.2 L/s) Max



2.8 Lb. (1.3 Kg)

Horizontal Extended Grinders For 3/8-24 Cone Wheels

0.9 H.P. (675 W)



40GHKCW



Type 17
Cone Wheel



Type 16
Cone Wheel



Type 17R
Cone Wheel



Type 18
Cone Wheel



Type 18R
Cone Wheel

Air Inlet Size: 1/4" NPT

Hose Size Recommendations: 3/8" (9.5 mm)

Extra Charge Accessories


- Safety Lever

Standard Equipment

- Tool • Operating Instructions and Service Manual
- 2 Wrenches (sizes based on options)

Quick Order Number Horizontal Cone Wheel Grinders

Model Number	Rated Speed	Throttle Type	
		Standard Lever	Safety Lever
40GH	22000 R.P.M.	40GHCW	40GHKCW

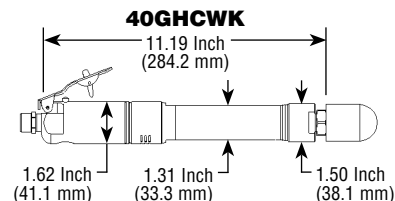

0.9 H.P.
(675 W)



30 cfm (14.2 L/s) Max



2.6 Lb. (1.2 Kg)