## **T豫P CAT08**

Carbide Burrs

Air Inlet Size: 1/4" NPT (1/4" BSP Available) Hose Size Recommendations: 3/8" (10 mm)

## **Right Angle Collet Grinders**



330RADK/340RADK

## **Quick Order Number**

		Maximum Operating Speed	Case Material			
Model Number	Collet Size					
			Aluminum	Steel		
280RAD	1/4 Inch	16000 RPM	280RAD;1/4	280RADS;1/4		
290RAD		26000 RPM	290RAD;1/4	290RADS;1/4		
330RAD		12000 RPM	330RAD;1/4	330RADS;1/4		
340RAD		20000 RPM	340RAD;1/4	340RADS;1/4		
All the versions listed in the table will be supplied with a standard lever						

throttle (class 1). A safety lever throttle (class 2) is also available.

This chart has been provided as a means to quickly identify a particular tool. The ordering numbers listed represent the most common versions of our tools. If more specialized versions are required, please build your model number per the following model number flow chart.



Mounted Stones

Safety Lever

**Extra Charge Accessories** 


• 2 Wrenches (sizes based on options)

• Tool • Operating Instructions and Service Manual

**Standard Equipment** 



Front view of 280RAD/290RAD/330RAD/340RAD Series Tools

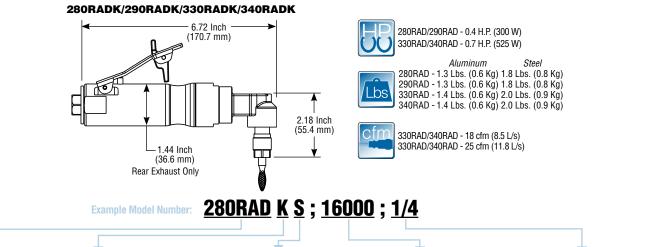

		· · · · · · · · · · · · · · · · · · ·		
Model Number	The blue Lever Style	highlighted entries are shown in the Case Material	e Quick Reference Box above. Operating Speed	Collet Size
<b>Ö</b> 280RAD	Please choose one of the following options: <b>No Designation</b> - Standard Lever <b>K</b> - Safety Lever	Please choose one of the following options: <b>No Designation</b> - Aluminum Case <b>S</b> - Steel Case	<b>16000</b> - 16000 R.P.M.	Please choose one of the following options: 1/8 - 1/8 Inch Collet 1/4 - 1/4 Inch Collet 3MM - 3mm Collet 6MM - 6mm Collet
🗘 290RAD			26000 - 26000 R.P.M.	
🌣 330RAD			<b>12000</b> -12000 R.P.M.	
<b>Ö</b> 340RAD			20000 - 20000 R.P.M.	
Ceared Tool	Safety Lever	Aluminum		







WARNING: Follow all recommendations from component and abrasive manufacturers for speeds and proper usage.

Flap Wheels